




Jacobs Chuck GC-5/15

- Ideal for gripping round rod-type samples
- Secures sample tightly with firm gripping
- Suitable for tensile and compression test



How to install test sample		
Open the chuck with the handle.	Insert the sample.	Fix it with the handle.
		


Specifications			
Model	GC-5	GC-15	GC-15-M10
Capacity	500N	1000N	1000N
Opening width (dia.)	Approx. 0.5 to 6.5mm	Approx. 2.0 to 13mm	Approx. 2.0 to 13mm
Size	See the Dimensions		
Weight*1	Approx. 235g	Approx. 500g	Approx. 500g
Mounting screws	M6	M6	M10
Attachment	Tightening handle	Tightening handle	Tightening handle

* Soft samples may break at the point of clamping.

* It may not be suitable for some deformable samples.

* It may not be suitable for slippery or hard samples.




*1 Weight of the attachment is also applied as a load on the force gauge. Consider it when selecting the capacity of a force gauge.

Examples of Product Configuration	
<p>Example 1 Code: 1G2003A For tensile and compression test up to 500N with high functionality and versatility</p> <p>Digital force gauge: ZTS-500N Motorized Test Stand: MX2-500N Optional Attachment: GC-5 Optional Attachment: GT-30 (Vise grip) Optional cable: CB-528</p>	 <p>Example 1 Image</p>
<p>Example 2 Code: 1G2004A For tensile and compression test up to 1000N with high functionality and versatility</p> <p>Digital force gauge: ZTS-1000N Motorized Test Stand: MX2-1000N Optional Attachment: GC-15 Optional Attachment: GT-30 (Vise grip) Optional cable: CB-528</p>	



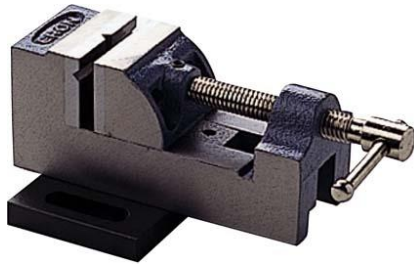

* Refer to the specification of each product for details.

* Product configuration varies depending on the shape and characteristic of the sample, and measurement conditions.

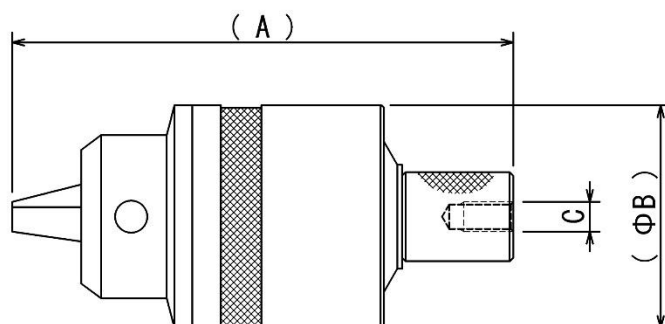
* The recommended capacity of force gauge varies depending on the expected force to be loaded.

Mountable Force Gauges		
DST/DSV Series	ZTS/ZTA series	FB/PS/PSM series
Digital force gauge with excellent cost-performance capable to manage data with PC	Digital force gauge with high precision, featuring high sampling rate and a variety of useful functions	Mechanical force gauge for easy handling
		

* Select suitable force gauge to correspond with the mounting screws of attachment.

Related Products		
Pin Grip CP-150N	Flat Chucks GC-1100/GC-1200/GC-5000	Vise Grip GT-30
Designed for gripping thin wire-type materials.	Grips with a wide opening for samples in various thickness.	To be mounted on test stand for fixing samples.
		
Attachment Adapters EJ6-1000N/EJ10-5000N		
For use between force gauge and attachment to fix samples easily to the attachment.		
		

[Dimensions]



Model	A	B	Screw hole C
GC-5	66	dia.32	M6
GC-15	101	dia.46	
GC-15-M10			M10

Unit: mm

[Cautions]

- Specifications are subject to change without prior notice.
- A force gauge (sold separately) is required to use this product.
- This product is designed for force testing only. Do not use it for any other purposes.
- Some samples may not be suitable to grip with this product.
- Do not copy and use this content without authorization.

IMADA CO., LTD

99 Jinnoshinden-cho aza Kanowari Toyohashi
Japan 441-8077
Tel: +81-(0)532-33-3288
Fax: +81-(0)532-33-3866
E-mail: info@forcegauge.net
Website: <https://www.forcegauge.net/en/>



Visit our website for more information on wide product specifications, measurement applications and videos.